


# Proposed Typical Section



- Construct an urban interim four-lane (ultimate six-lane) roadway
- Lane widths vary from 11-foot to 12-foot-wide lanes depending on ROW restrictions
- Proposed 10-foot shared use paths and a variable-width raised median
- Turn lanes, where applicable, at side streets and intersections
- New location roadway at portions of proposed alignments

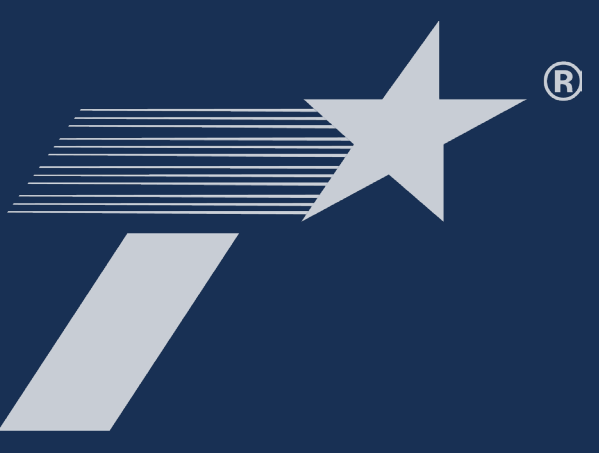