




Phase 1 of Construction


Phase 1 Construction: Two-Way Access Road

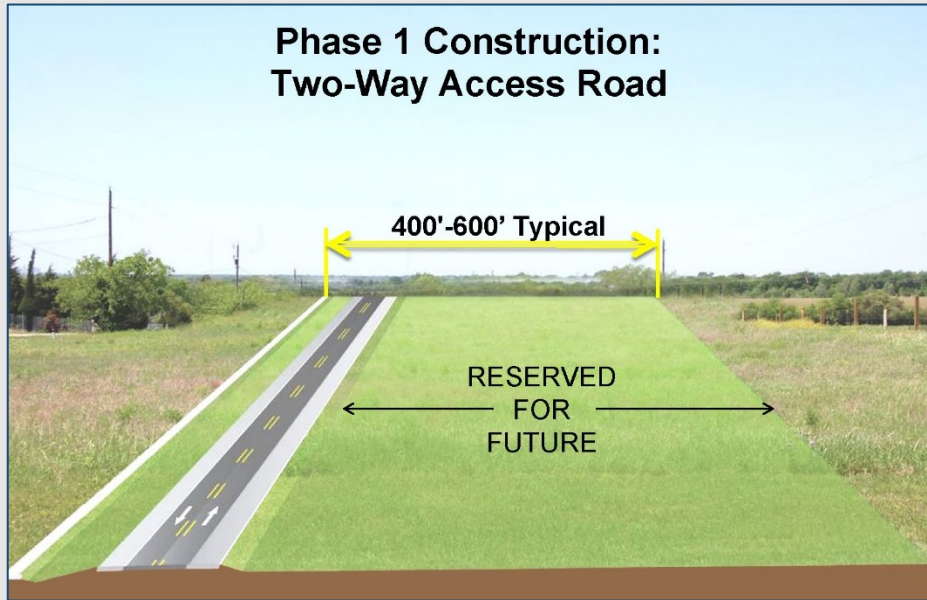

- The new location Loop 9 frontage road system would include an eastbound and westbound frontage road facility, each consisting of three 12-foot lanes, an 8-foot inside shoulder, and an 8-foot outside shoulder for bicycle accommodations within the rural section of the proposed roadway. The proposed project ROW would include a median wide enough to accommodate the future construction of an ultimate access-controlled mainlane facility.

Phase 2 of Construction

Potential Phased Construction Option: One-Way Access Roads

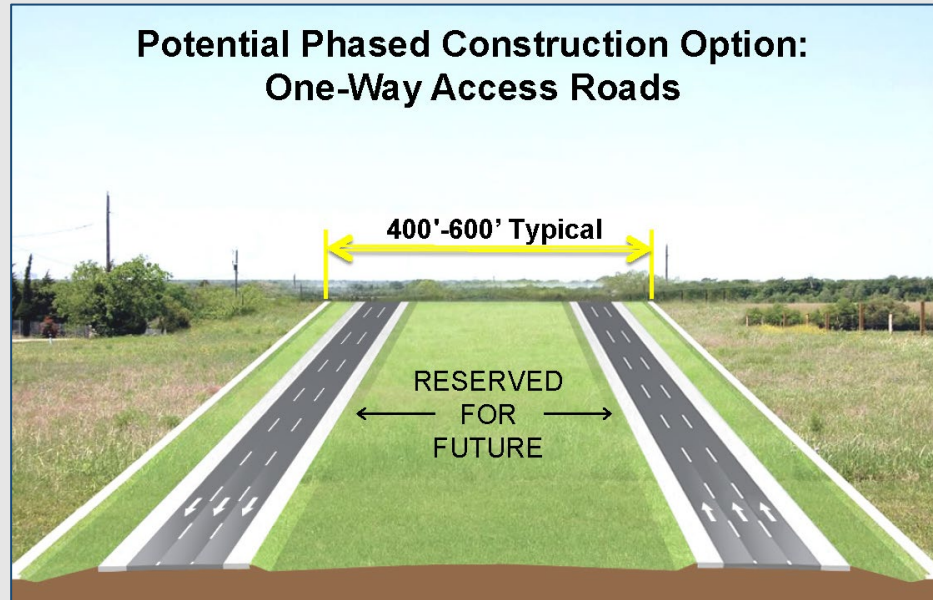

Phase 2 would be constructed as traffic warrants and funding becomes available.